


Grace *Hoop²DM*

Stand Accessory Instructions

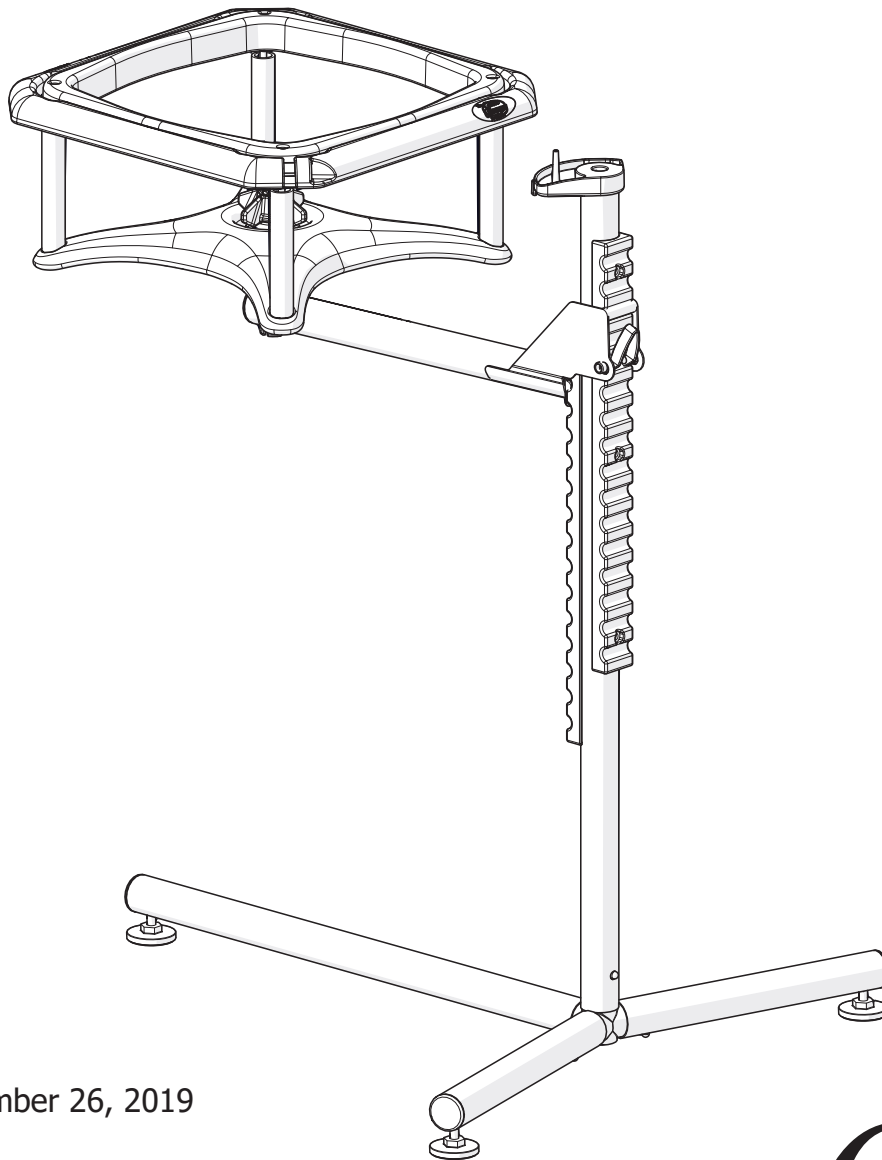

Copyright December 26, 2019

Grace Company

(Reproduction Prohibited)

Version 1.3

MADE BY
Grace

Included Parts & Tools


Please make sure all pieces are included in your kit.

**Allen Wrench
4 mm**




HDW-03-10167

Gripping Claw




GCF-05-14132

Swivel Ball Joint




GCF-09-14222

Threaded Knob




GCF-05-14139

Center Joint




GCF-04-14145

Back Leg (x2)




GCF-09-14219

Front Leg




GCF-09-14220

Leveling Feet



HDW-03-10257

Support Stand




GCF-09-14328

Secure Spring



GCF-05-14179


Stand Tray




GCF-09-14217

Preparing the Lap-Hoop


- 1 Use the 4 mm Allen wrench to unscrew all four spacer bolts to disassemble the lap-hoop. If the lap-hoop has not been assembled previously, skip this step.

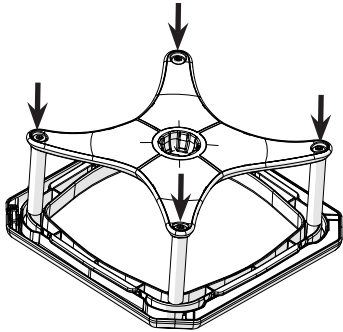


- 2 Place the **lap-hoop base** on the edge of a flat surface, with one leg hanging over. The curved side should face up.

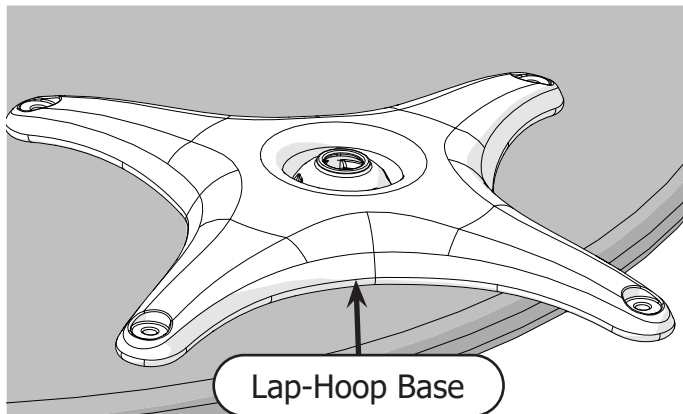


- 3 Insert a **column spacer** into each of the lap-hoop slots.

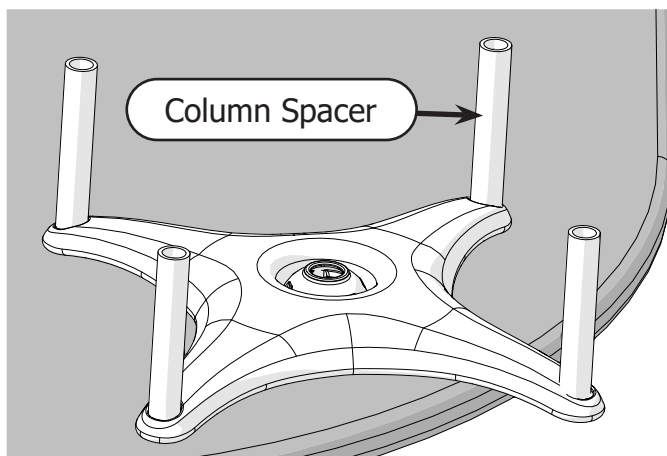


- 4 Align the screw holes and carefully balance the **inner hoop** on the column spacers.

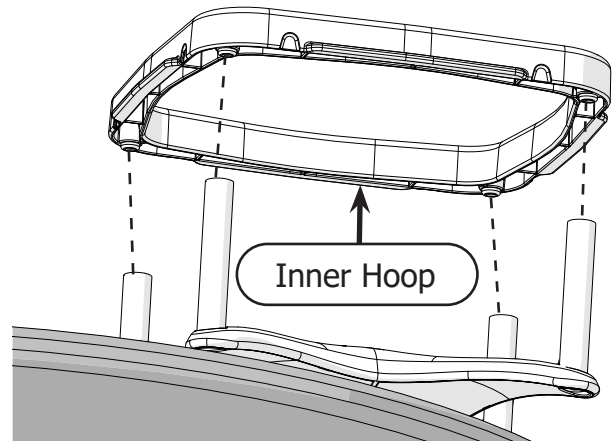


- 5 Screw a **spacer bolt** through the base, spacer column, and into the inner hoop using the 4 mm Allen wrench. Repeat with the remaining spacer bolts.

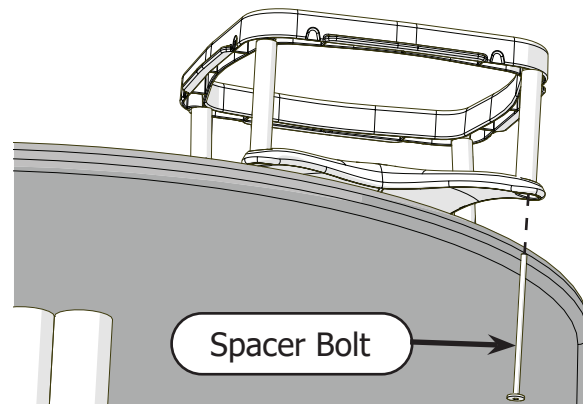


- 6 Press the ball end of the **swivel ball joint** into the **gripping claw**.

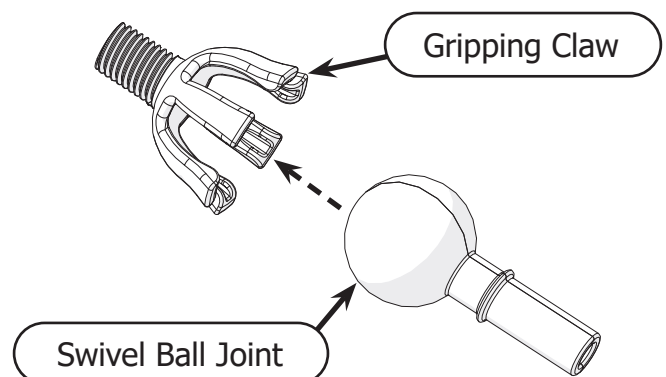

- 7 Slide the gripping claw through the hole in the bottom of the **lap-hoop**.

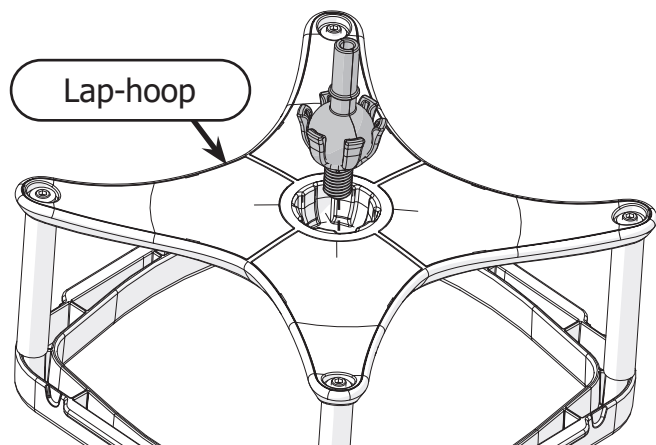


- 8 Screw the **threaded knob** onto the gripping claw.

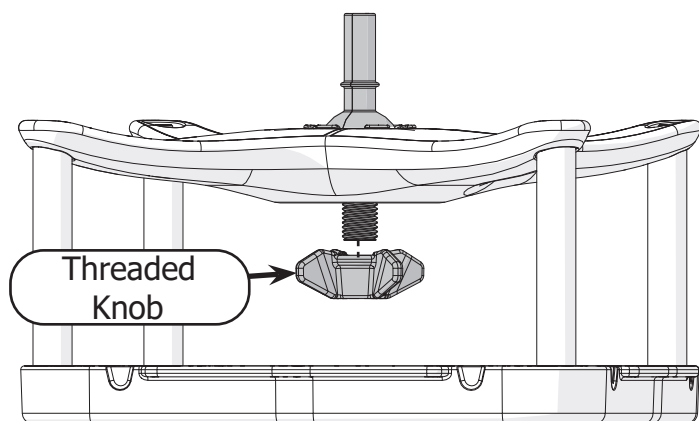


Assembling the Stand


- 1 The **front leg** (longest leg) is attached to the **center joint** end with the **sticker**.

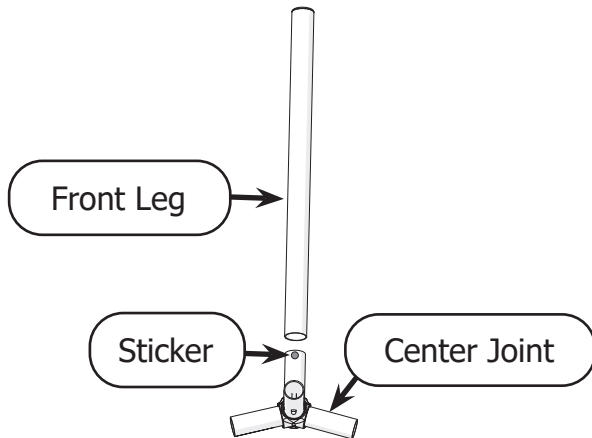


- 2 Press in on the **tab** and slide the leg onto the center joint.

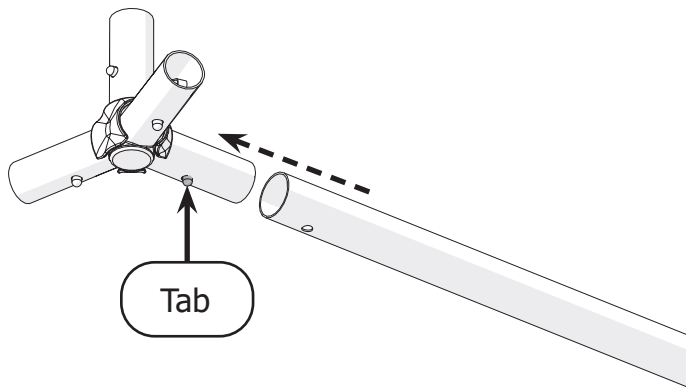


- 3 Repeat for the back legs.

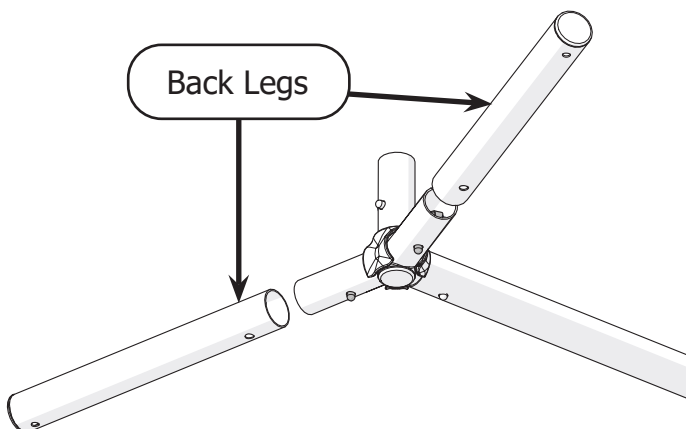


- 4 Screw each of the **leveling feet** into the legs.

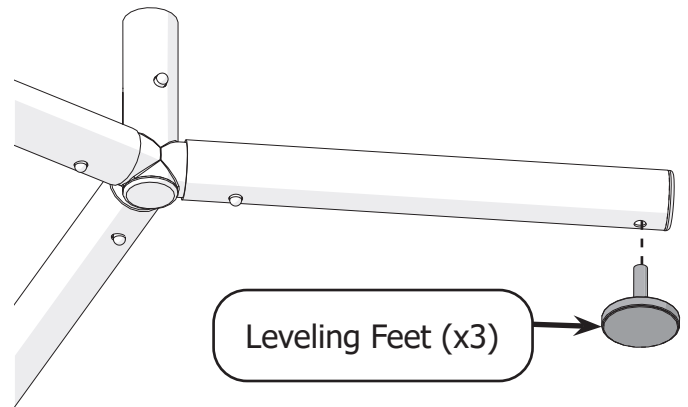


- 5 Press in on the **tab** on the center joint and slide the **support stand** onto the center joint.

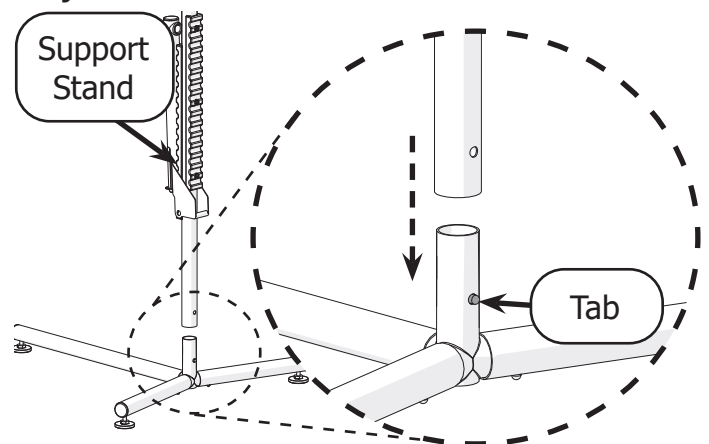


- 6 Lift the **support arm** up and slide it over the support stand to the desired height.

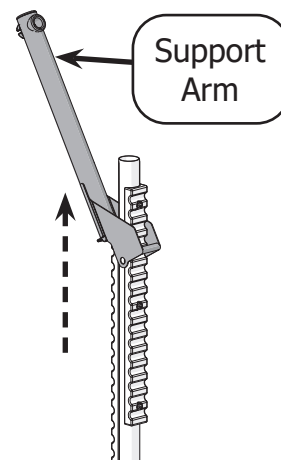


- 7 Lay the arm flat to set the height.

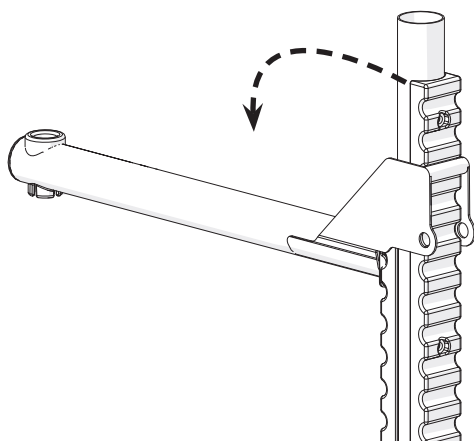


- 8 Squeeze the two sides of the **secure spring** and slide the tabs into the two holes on the support arm.

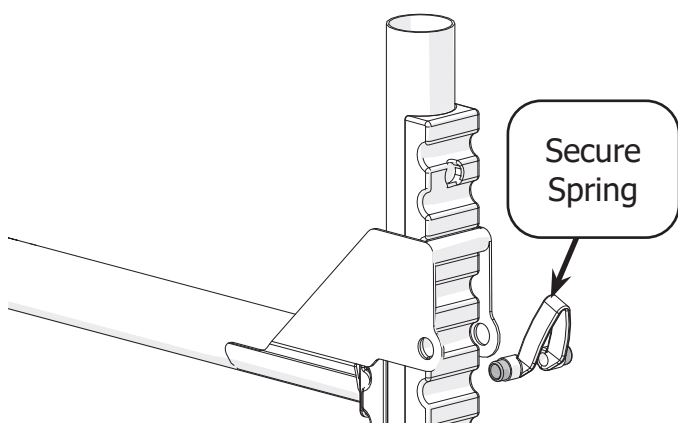

- 9 Slide the **tray** onto the support stand.

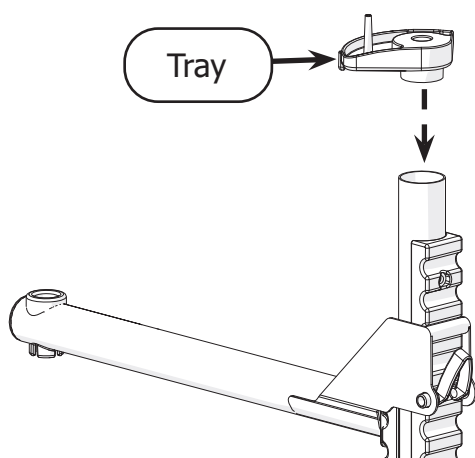


- 10 Press the end of the **swivel ball joint** through the hole in the support arm.

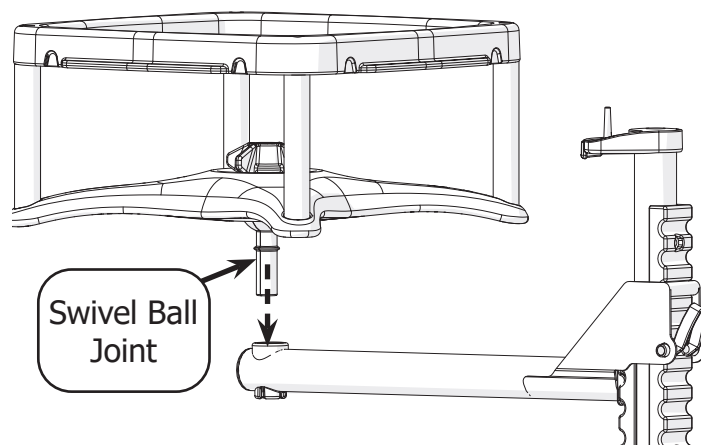


Loading the Fabric


- 1 Lay the quilt over the lap-hoop.

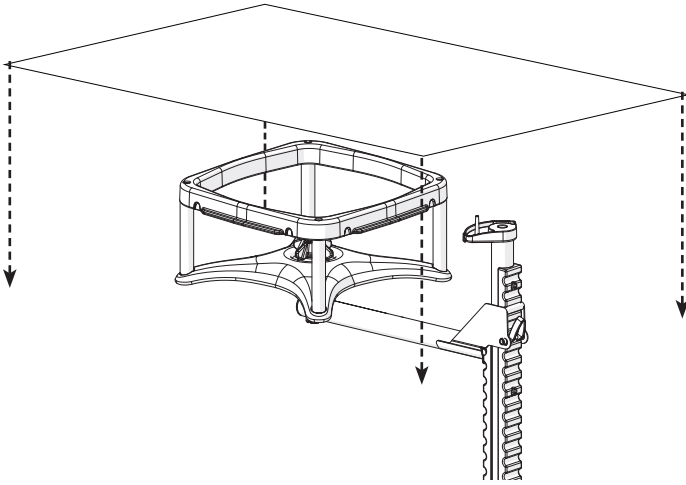

- 2 Position the fabric so the area you wish to stitch onto is inside the hoop.

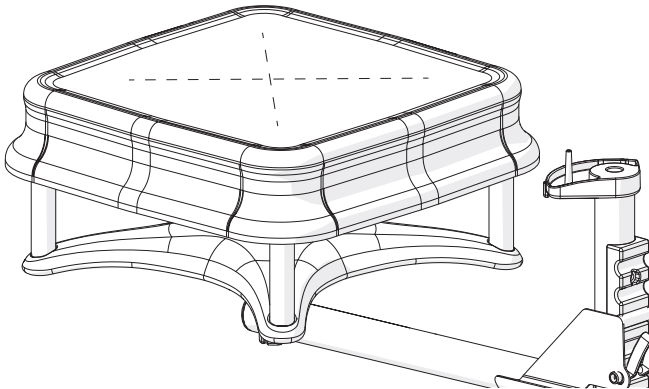

- 3 Keep the fabric smooth and slide the **outer hoop** down onto the lap-hoop.

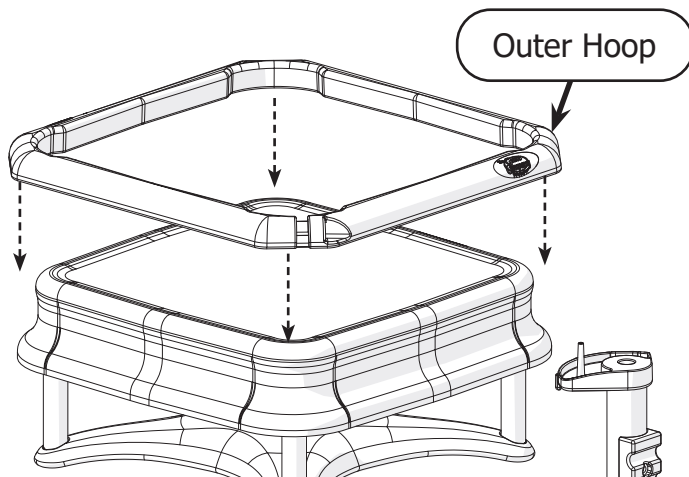

- 4 Turn the corner screw to loosen or tighten the outer hoop.

