

Loosening Belts for Free-motion Quilting

To loosen the belts on your machine and frame to give you the ability to free-motion quilt.

1. Pull machine to the side of your frame to allow you to clear access to the belt bracket on your machine.



2. Using the M3 allen wrench loosen the two screws on the front belt bracket.


3. Loosen enough to pull the belt out of the front end.



4. Retighten the screws and bracket without the belt.

Loosening Belts for Free-motion Quilting

5. Move to the back of the machine and loosening the right-side knob by unscrewing it.

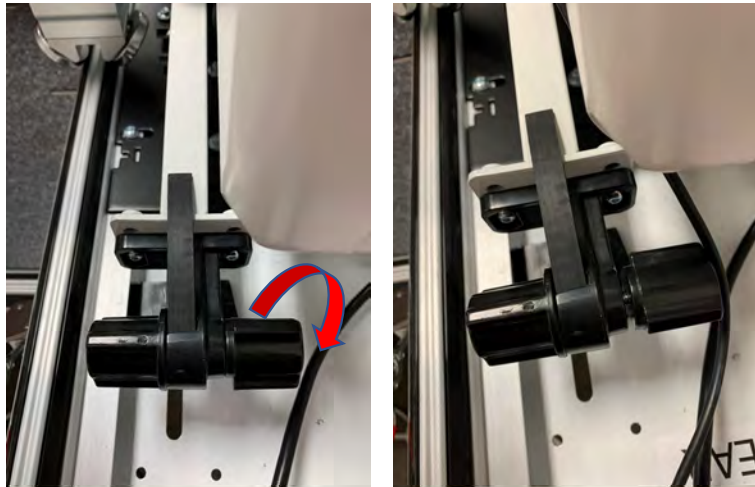

6. Using the left knob of the bracket, unscrew the belt out of the bracket.

Notice how the belts hit the machine? We will now tape or Velcro them down.



Loosening Belts for Free-motion Quilting

7. Using either tape or Velcro to hold the belt down both on the front and back of the bottom carriage.



8. Repeat the same process for the belt attached to the frame.



Now you are set to Free-motion quilt and the belts are out of your way!